

SMD Seam Sealing Crystals 2.0x1.6x0.5mm AS21 Series



Features

- Reliable seam sealed ceramic package.
- Wide operating temperature range.
- Superior and reliable performance in harsh environment.
- Application: TPMS, ECM, ABS and sensor modules.
- RoHS Compliant / Pb Free.






Crystals specifications

ITEMS/TYPE	AS21
Frequency Range	16~54MHz
Vibration Mode	Fundamental
Load Capacitance	8pF, 10pF, 12pF, or specify
Frequency Tolerance (at 25℃)	±20ppm, or specify
Frequency Stability Over Operating Temperature Range	±150ppm Max.
Operating Temperature Range	-40~+125℃, or specify
Drive Level	1~200μW Max. (100μW typical)
Storage Temperature Range	-40~+125℃
Reliability Standard	AEC-Q200
Packing Unit	1,000pcs/Reel

Equivalent Series Resistance(ESR)

Fundamental	
16~19.2MHz	200 Ω Max.
19.2~30MHz	100 Ω Max.
30~54MHz	80 Ω Max.

Dimensions and patterns(unit:mm)

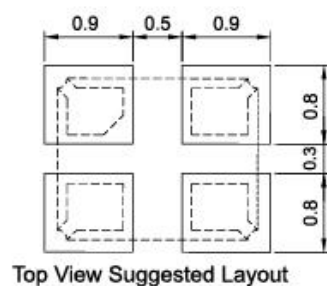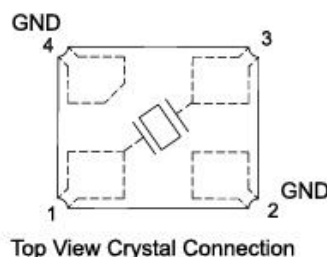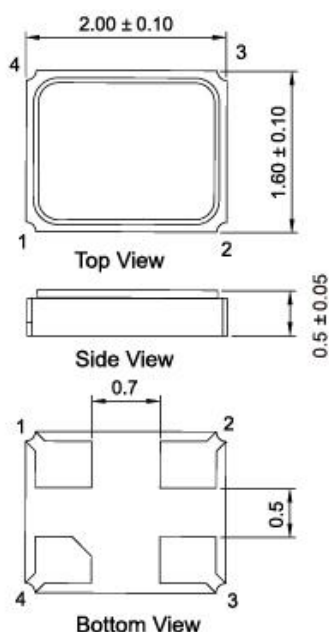

Units:mm